



AC-CFT5-QM/W2R2


Key features: 3K colorvu fixed lens turret analog camera, 4 output signals switchable, 1 built-in microphone, 20m infrared light and 20m white light supplement

Camera	
Model	AC-CFT5-QM/W2R2
Product Name	3K Outdoor Smart Hybrid light ColorVu Fixed Lens Turret Analog Camera
Image Sensor	3K CMOS
Resolution	2960 (H) × 1665 (V)
Min. Illumination	0.001 Lux @(F1.0, AGC ON), 0 Lux with white light
Shutter Time	PAL: 1/25 s to 1/50,000 s; NTSC: 1/30 s to 1/50,000 s
Day &Night	IR Cut Filter
Angle Adjustment	Pan: 0°to 360°, Tilt: 0°to 75°, Rotation: 0°to 360°
Signal System	PAL/NTSC
Light Alarm	Solid Light Alarm (White Light)
Lens	
Lens Type	Fixed focal lens, 2.8 mm, 3.6 mm available
Field of View	2.8 mm, horizontal FOV: 110°, vertical FOV: 60°, diagonal FOV: 143° 3.6 mm, horizontal FOV: 94°, vertical FOV: 50°, diagonal FOV: 112°
Lens Mount	M12
Night Vision	
Supplement Light Type	IR light and white light
Supplement Light Range	Up to 66ft (20 meters)
Smart Supplement Light	Yes
Image	
White Light	Auto/Off
Image Mode	STD/HIGH-SAT/HIGHLIGHT
Image Setting	Brightness, Sharpness, Anti-banding, AGC
Frame Rate	TVI: 3K @ 20 fps, 4MP @ 30fps/25fps, 1080p @ 30fps/25fps AHD: 5MP @ 20fps, 4MP @ 30fps/25fps CVI: 4MP @ 30fps/25fps CVBS: PAL/NTSC
Day/Night Mode	Auto
WDR (Wide Dynamic Range)	Digital WDR

UNO-IOT Products Datasheet

Noise Reduction	2D DNR
AGC	Yes
Image Enhancement	DWDR, BLC, HLC, Global, HLS
White Balance	Auto/Outdoor/Global/Manual
Interface	
Video Output	Switchable TVI/AHD/CVI/CVBS
Microphone	1 built-in microphone
Speaker	N/A
Audio In/Out	N/A
Alarm In/Out	N/A
General	
Operating Conditions	-40°C to 60°C (-40°F to 140°F), Humidity: 90% or less (non-condensing)
Power Supply	12 VDC ± 25%
Consumption	Max.3.9 W
Protection Level	IP67
Material	Metal
Dimension	Ø 85.1 mm × 77.62 mm (Ø 3.35" × 3.05")
Weight	Approx. 330 g (0.73 lb.)
Language	English

Dimension

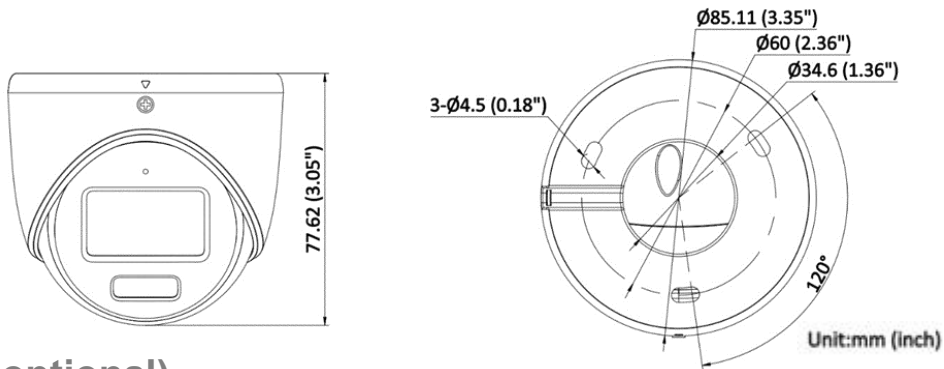

Accessories (optional)

Junction box	Wall mount	Vertical pole mount	Corner mount
DS-1280ZJ-XS	DS-1272ZJ-110-TRS	DS-1275ZJ-SUS	DS-1276ZJ-SUS
